



IP65

IK08

5
YEARS
WARRANTY

Lucia

Lucia bollard range consisting of three different versions that are stand alone short, long and triple on pole. Design of this luminaire range is well accepted in projects like gardens, walkways etc. Technically and decoratively developed against corrosive environmental conditions. Body components are constructed from aluminium integrated with frosted PC diffuser.

Lucia bollard is developed to function with energy efficient SMD led technology to create energy saving and decorative ambient lighting.

EN

- Corrosion resistant aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Convenient to be used with module led.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K and 5000K.
- Thermal shock resistant diffuser glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in white, black, dark gray and light gray finish.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- All external screws are stainless steel.
- High colour consistency: <3 SDCM

TR


- Korozyona dayanıklı alüminyum gövde.
- 220-240V / 50-60Hz enerji girişli.
- Modül Led ile kullanıma uygundur.
- 2700K, 3000K, 3500K, 4000K ve 5000K renk sıcaklığı seçenekleri mevcuttur.
- Termal şoka dayanıklı plexi cam.
- Su geçirmezliği sağlayan silikon conta.
- Ultraviyole ışıma dayanıklı beyaz, açık gri, antrasit gri ve siyah elektrostatik toz boyalı.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı gövde.
- Tüm dış civatalar paslanmaz çelik.
- Yüksek LED renk uyumu: <3 SDCM



PBS SASO CB LVD ENEC CE IP 65 IK08



A A+ A++



4 / Product Color / Ürün Renk



White = 01



Light Gray = 04




Textured Metallic
Dark Gray = 05



Black = 03

Technical Drawing / Teknik Çizim



Lucia / O07.BL.07950



* Code example / Kod örneği:

O07.BL.07950 . 12 . 827 . 01


- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
12W	CRI>80	O07.BL.07950 . (.) . (..) . (..) . (..)	2700K	1176
			3000K	1212
			3500K	1233
			4000K	1255
			5000K	1278
			6500K	X

2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin	4	Product Color / Ürün Renk
12	12W	827	CRI>80 - 2700K		01 white
		830	CRI>80 - 3000K		02 ral 9010
		835	CRI>80 - 3500K		03 black
		840	CRI>80 - 4000K		04 gray
		850	CRI>80 - 5000K		05 dark gray
					06 special color




PBS SASO CB LVD ENEC CE IP 65 IK08



4 / Product Color / Ürün Renk



Technical Drawing / Teknik Çizim



Lucia / O07.BL.07955



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
12W	CRI>80	O07.BL.07955 . (..) . (...) . (..) . (..)	2700K	1176
			3000K	1212
			3500K	1233
			4000K	1255
			5000K	1278
			6500K	X

* Code example / Kod örneği:

O07.BL.07955 . 12 . 827 . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk

2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin	4	Product Color / Ürün Renk
12	12W	827	CRI>80 - 2700K	01	white
		830	CRI>80 - 3000K	02	ral 9010
		835	CRI>80 - 3500K	03	black
		840	CRI>80 - 4000K	04	gray
		850	CRI>80 - 5000K	05	dark gray
				06	special color




PBS SASO CB LVD ERL CE IP 65 IK08

LED A A+ A++




0° 0°



4 / Product Color / Ürün Renk

White = 01 Light Gray = 04 Textured Metallic Dark Gray = 05 Black = 03

Technical Drawing / Teknik Çizim

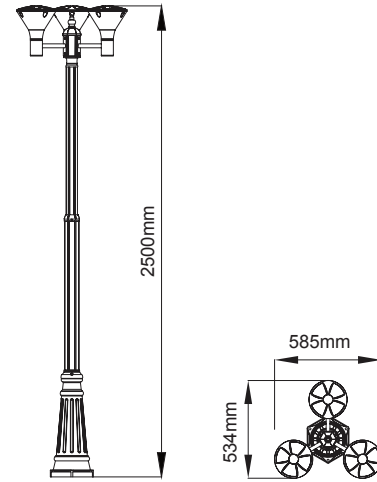

Lucia / O07.BL.07960



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
3x12W	CRI>80	O07.BL.07960 . (..) . (...) . (..) . (..)	2700K	3x1176
			3000K	3x1212
			3500K	3x1233
			4000K	3x1255
			5000K	3x1278
			6500K	X

* Code example / Kod örneği:

O07.BL.07960 . 36 . 827 . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk

2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin	4	Product Color / Ürün Renk
36	13x2W	827	CRI>80 - 2700K	01	white
		830	CRI>80 - 3000K	02	ral 9010
		835	CRI>80 - 3500K	03	black
		840	CRI>80 - 4000K	04	gray
		850	CRI>80 - 5000K	05	dark gray
				06	special color