




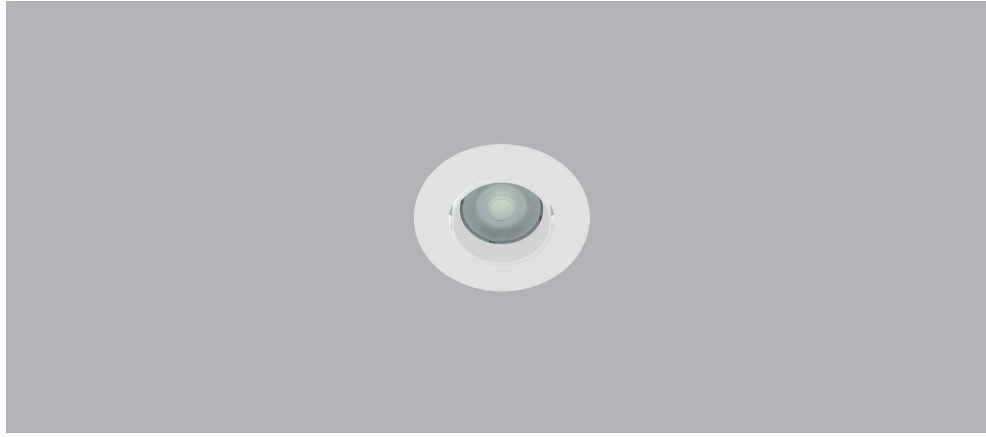


5 / Product Color / Ürün Renk



Technical Drawing / Teknik Çizim



4 / Reflector Angle / Reflektör Açısı



Miniflux / I01.MLR.12014

	Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
	27W	CRI>80	I01.MLR.12014 . (...) . (...) . (...) . (...)	2700K	3585
				3000K	3670
				3500K	3672
				4000K	3674
				5000K	3747
		CRI>90	I01.MLR.12014 . (...) . (...) . (...) . (...)	2700K	3351
				3000K	3430
				3500K	3432
				4000K	3434
				5000K	X
		CRI>98	I01.MLR.12014 . (...) . (...) . (...) . (...)	2700K	2680
				3000K	2744
				4000K	2747

* Code example / Kod örneği:

I01.MLR.12014 . 27 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

2	Watt - Driving Current / Watt - Sürüş Akımı		3		CRI / Kelvin		4	Reflector Angle / Reflektör Açısı		5		Product Color / Ürün Renk	
	27	27W - 700mA	827	CRI>80 - 2700K	930	CRI>90 - 3000K		SS	17° - Super Spot	01	white		
			830	CRI>80 - 3000K	935	CRI>90 - 3500K		SP	23° - Spot	02	ral 9010		
			835	CRI>80 - 3500K	940	CRI>90 - 4000K		ME	34° - Medium	03	black		
			840	CRI>80 - 4000K	9827	CRI>98 - 2700K		WF	55° - Wide Flood	04	gray		
			850	CRI>80 - 5000K	9830	CRI>98 - 3000K				05	dark gray		
			927	CRI>90 - 2700K	9840	CRI>98 - 4000K				06	special color		