


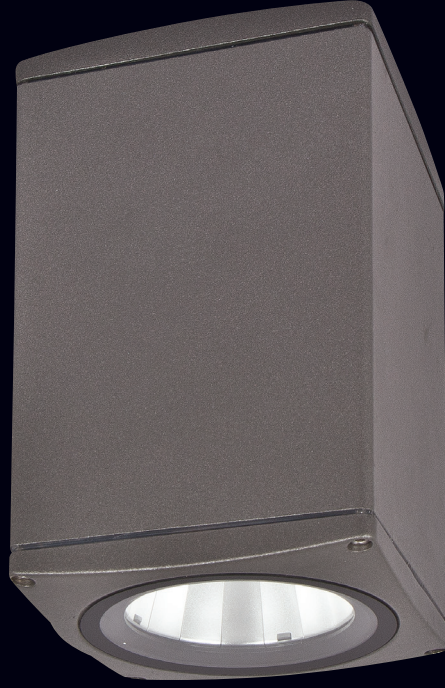

Nemo Surface

Nemo range can also be delivered in surface mounting version under the product family name Nemo Surface. Symmetrical light output. High efficient Miro Silver reflector attachment with highest lumen per watt COB leds maximizes the light output to emphasis the building facades.

Specially processed safety glass prevents dirt and water from accumulating on the luminaires.


EN

- Corrosion resistant die cast aluminium alloy.
- Installation with special base on ceiling.
- Mains voltage: 220-240V / 50-60Hz.
- Spot, medium, wide and wide flood beam angles available.
- Convenient to be used with COB led.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K and 5000K.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in white, black, dark gray and light gray finish.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- All external screws are stainless steel.
- High colour consistency: <3 SDCM
- Up to 115lm/W efficiency.
- L80 B10 50000hrs and five years warranty.

TR

- Korozyona dayanıklı alüminyum gövde.
- Tavana özel tabla sistemi ile montaj edilmektedir.
- 220-240V / 50-60Hz enerji girişi.
- Dar, orta, geniş ve çok geniş açı seçenekleri mevcuttur.
- COB Led ile kullanıma uygundur.
- 2700K, 3000K, 3500K, 4000K ve 5000K renk sıcaklığı seçenekleri mevcuttur.
- Termal şoka dayanıklı tamperli cam.
- Su geçirmezliği sağlayan silikon conta.
- Ultraviyole ışımaya dayanıklı beyaz, açık gri, antrasit gri ve siyah elektrostatik toz boyalı.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı gövde.
- Tüm dış civatalar paslanmaz çelik.
- Yüksek LED renk uyumu: <3 SDCM
- 115lm/W'a kadar ulaşan verim.
- L80 B10 50000 saat ve beş yıl garanti.

Nemo Surface

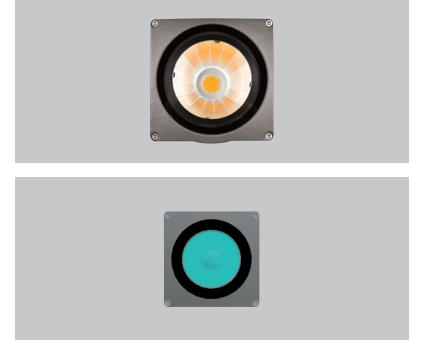

5 / Product Color / Ürün Renk



White = 01



Light Gray = 04



Textured Metallic
Dark Gray = 05




Black = 03

Nemo Surface / 007.SM.00074




Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
28W	CRI>80	007.SM.00074 . (..) . (...) . (..) . (..)	2700K	2952
			3000K	3083
			3500K	3153
			4000K	3228
			5000K	3246




2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin	4	Reflector Angle / Reflektör Açısı	5	Product Color / Ürün Renk
28	28W - 700mA	827	CRI>80 - 2700K	SP	20° - Spot	01	white
24	24W - 600mA	830	CRI>80 - 3000K	ME	30° - Medium	02	ral 9010
20	20W - 500mA	835	CRI>80 - 3500K	FL	40° - Flood	03	black
		840	CRI>80 - 4000K	WF	60° - Wide Flood	04	gray
		850	CRI>80 - 5000K			05	dark gray
						06	special color

Nemo Mini Surface / 007.SM.00077



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
14W	CRI>80	007.SM.00077 . (..) . (...) . (..) . (..)	2700K	993
			3000K	1093
			3500K	1125
			4000K	1130
			5000K	1135



2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin	4	Reflector Angle / Reflektör Açısı	5	Product Color / Ürün Renk
14	14W - 350mA	827	CRI>80 - 2700K	SP	20° - Spot	01	white
10	10W - 250mA	830	CRI>80 - 3000K	ME	35° - Medium	02	ral 9010
7	7W - 180mA	835	CRI>80 - 3500K	FL	45° - Flood	03	black
		840	CRI>80 - 4000K	WF	60° - Wide Flood	04	gray
		850	CRI>80 - 5000K	OV	20° x 45° - Oval	05	dark gray
						06	special color