

Benzin Canopy



Benzin Canopy



EN

- Direct lighting luminaire designed to be used in petrol stations.
- Corrosion resistant die-cast aluminium body.
- Mounting external bracket with optional size to adapt different cutout sizes.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K, 5000K and 6500K.
- 65° wide and 98° wide flood beam angle options to meet lighting standards of petrol stations.
- Internal silicon gaskets ensure IP protection.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Up to 121lm/W efficiency.
- High colour consistency: <3 SDCM
- Stainless steel cable gland and mains cable provided with IP68 socket.
- 1-10V and DALI control options available.
- Reliable system with L80 B10 50000 hours lifetime parameters.
- Five years warranty.

TR

- Led'li simetrik ışık çıkışlı, benzin istasyonu aydınlatması için tasarlanmış armatür.
- Korozyona dayanıklı alüminyum enjeksiyon gövde.
- Farklı ölçülerde üretilebilen montaj braketleri sayesinde farklı delik ölçülerine adapte olunabilir.
- 220-240V / 50-60Hz enerji girişi.
- Akıllı soğutma tasarımı.
- 2700K, 3000K, 3500K, 4000K, 5000K ve 6500K renk sıcaklığı seçenekleri mevcuttur.
- Benzin istasyonu aydınlatma standardına uygun 65° geniş ve 98° çok geniş açılı optik.
- Silikon contalar ile IP koruması sorunsuz sağlanır.
- Tüm dış vidalar paslanmazdır.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı.
- 121lm/W'a kadar ulaşan verim.
- Yüksek renk uyumu: <3 SDCM
- Armatürde paslanmaz kablo rekoru kullanılmaktadır ve 220V ana şebeke kablosunda IP68 korumalı konektör bulunmaktadır.
- 1-10V ve DALI kontrol sistem seçenekleri mevcuttur.
- L80 B10 50000 saat parametrelerine sahip güvenli sistem.
- Beş yıl garanti.

Benzin Canopy



5 / Product Color / Ürün Renk



White = 01





Light Gray = 04




Textured Metallic
Dark Gray = 05



Black = 03



Technical Drawing / Teknik Çizim

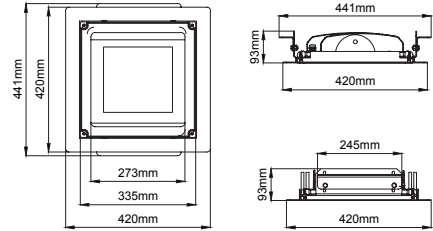

Benzin Canopy / O07.WL.16200



* Code example / Kod örneği:

O07.WL.16200 . 100 . 827 . FL . 01

1- Product code / Armatür kodu

2- Power / Güç

3- CRI / Kelvin

4- Reflector angle / Reflektör açısı

5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
100W	CRI>70	O07.WL.16200 . (..) . (...) . (..) . (..)	2700K	11276
			3000K	11407
			3500K	11930
			4000K	12192
			5000K	12324
			6500K	12456
	CRI>80	O07.WL.16200 . (..) . (...) . (..) . (..)	2700K	10607
			3000K	10776
			3500K	11271
			4000K	11520
			5000K	11644
			6500K	11768

2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin		4	Reflector Angle / Reflektör Açısı	5	Product Color / Ürün Renk
100	100W - 700mA	727	CRI>70 - 2700K	827	CRI>80 - 2700K	FL	65° - Flood	01 white
	75	75W - 480mA	730	CRI>70 - 3000K	830	CRI>80 - 3000K	WF	98° - Wide Flood
	50	50W - 320mA	735	CRI>70 - 3500K	835	CRI>80 - 3500K		03 black
		740	CRI>70 - 4000K	840	CRI>80 - 4000K			04 gray
		750	CRI>70 - 5000K	850	CRI>80 - 5000K			05 dark gray
		765	CRI>70 - 6500K	865	CRI>80 - 6500K			06 special color