

LUMEA MIDI & MINI

Downlight



LUMEA MIDI and MINI integrates latest technology high power leds with excellent beam control. Heatsink designed to ensure longest lifetime. It is convenient to be used in many applications.

Apart from classic dimming systems of 1-10V, Phase-Cut DIM and DALI, Tunable White, Warm DIM and Wireless DIM options can be applied to LUMEA MIDI and MINI.


LUMEA MIDI and MINI mükemmel açı kontrolü sağlanabilen lens ve son teknoloji power Led'lerle sahiptir. Soğutucu Led'lerin maksimum ömür ile çalışmasını sağlar.

Klasik DALI, 1-10V ve Faz DIM seçenekleri dışında Sıcak DIM, Dinamik Beyaz ve Kablosuz DIM gibi sistemlerde uygulanabilir.

Lumea Midi & Mini



4 / Reflector Angle / Reflektör Açısı



* See page 757 for ldt files. / Işık eğrileri için sayfa 757 bakınız.

5 / Product Color / Ürün Renk



Lumea Midi / I02.PLR.15045




* Code example / Kod örneği:

I02.PLR.01020 . 8 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
8W	CRI>80	I02.PLR.15045 . (..) . (..) . (..) . (..)	2700K	922
			3000K	950
			3500K	970
			4000K	990
			5000K	1020
	CRI>90	I02.PLR.15045 . (..) . (..) . (..) . (..)	2700K	857
			3000K	884
			3500K	902
			4000K	920
			5000K	X

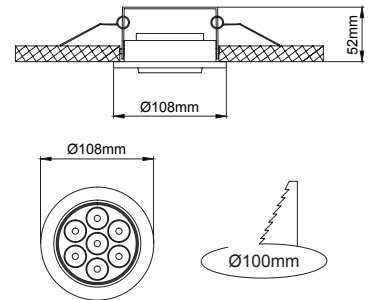

Lumea Mini / I02.PLR.01020



* Code example / Kod örneği:

I02.PLR.01020 . 6 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
6W	CRI>80	I02.PLR.01020 . (..) . (..) . (..) . (..)	2700K	713
			3000K	735
			3500K	750
			4000K	765
			5000K	788
	CRI>90	I02.PLR.01020 . (..) . (..) . (..) . (..)	2700K	663
			3000K	684
			3500K	698
			4000K	712
			5000K	X

