




JOKER Linea Led



JOKER is new generation Avolux panel fixture with super slim design with plastic lens optic that gives ultra high efficient light output with UGR<9. Designed for illuminating various work areas like offices, hospitals, clinics, schools, governmental buildings etc. Can be easily mounted to suspended ceilings with visible T-bars and false ceiling systems.


SMD board technology inside together with high efficient optics maximize the efficiency up to 125lm/W.

JOKER Avolux yeni jenerasyon panel armatür serisine dahildir. İnce yapılı gövde yapısı ve özel tasarım lens optik sayesinde UGR<9 düşük kamaşma ve ekstra yüksek lm/W verim elde edilir. Ofis, okul, hastane, klinik, kamu binaları gibi birçok farklı projede tercih edilebilir. T-Profil tavanlara ve alçıpan tavan sistemlerine kolayca uygulanabilir.


Armatür içersine uygulanan SMD Led teknolojisi ve verimli optik yapısı sayesinde 125lm/W'a kadar verimlilik sağlanır.




102.LL.19784

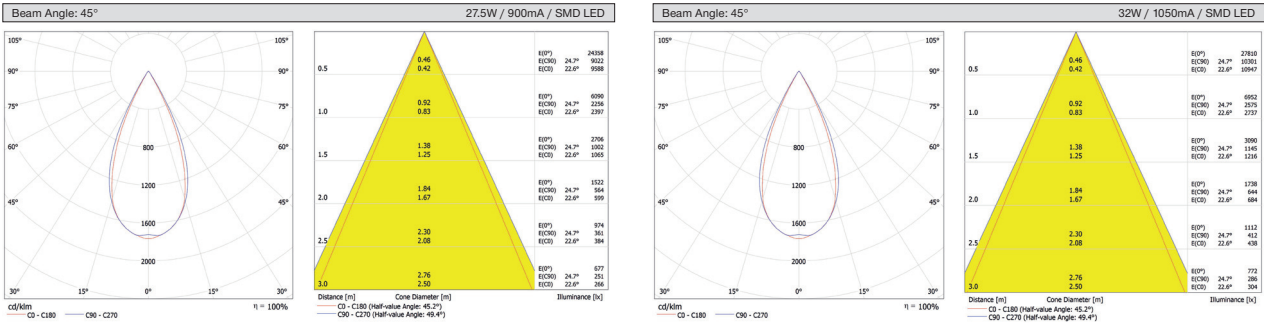

102.LL.19783

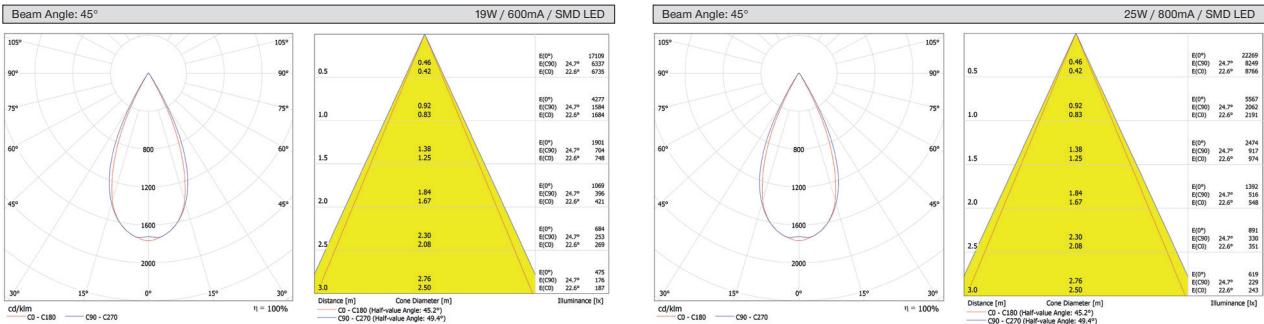

102.LL.19782

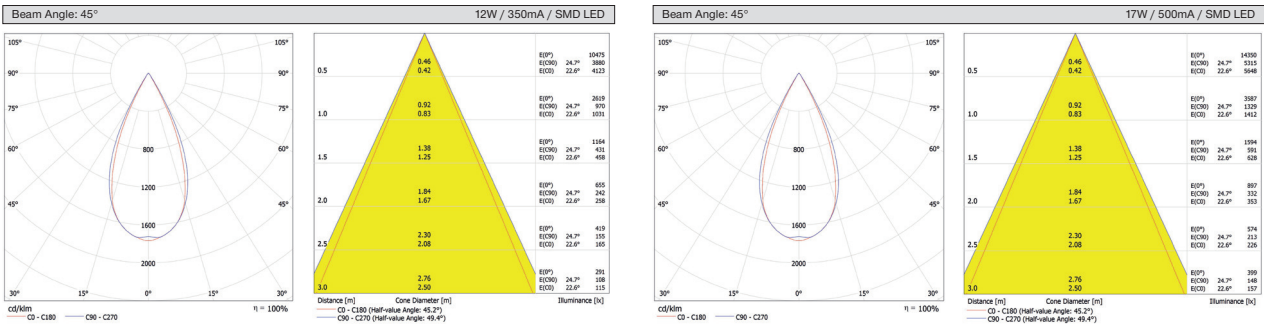


Joker / I02.LL.19784



* Code example / Kod örneği:

I02.LL.19784 . 032 . 830 . 01 . V1
1 2 3 4 5

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk
- 5- Ceiling Type / Tavan tipi
- 6- Control type / Kontrol tipi



Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	27.5W 900mA lm	32W 1050mA lm
595x595mm	CRI>80	I02.LL.19784 . (...) . (...) . (...) . (...)	2700K	3048	3521
			3000K	3163	3654
			3500K	3336	3853
			4000K	3451	3940
			5000K	3485	4025
	CRI>90	I02.LL.19784 . (...) . (...) . (...) . (...)	2700K	2691	3108
			3000K	2703	3122
			3500K	2761	3188
			4000K	2818	3255


Joker / I02.LL.19783



* Code example / Kod örneği:

I02.LL.19783 . 025 . 830 . 01 . V1
1 2 3 4 5

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk
- 5- Ceiling Type / Tavan tipi
- 6- Control type / Kontrol tipi



Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	19W 600mA lm	25W 800mA lm
595x595mm	CRI>80	I02.LL.19783 . (...) . (...) . (...) . (...)	2700K	2141	2787
			3000K	2222	2892
			3500K	2344	3049
			4000K	2424	3155
			5000K	2449	3185
	CRI>90	I02.LL.19783 . (...) . (...) . (...) . (...)	2700K	1890	2460
			3000K	1899	2471
			3500K	1939	2523
			4000K	1979	2576


Joker / I02.LL.19782



* Code example / Kod örneği:

I02.LL.19782 . 017 . 830 . 01 . V1
1 2 3 4 5

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Colour / Ürün renk
- 5- Ceiling Type / Tavan tipi
- 6- Control type / Kontrol tipi



Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	12W 350mA lm	17W 500mA lm
595x595mm	CRI>80	I02.LL.19782 . (...) . (...) . (...) . (...)	2700K	1310	1795
			3000K	1360	1863
			3500K	1434	1965
			4000K	1484	2033
			5000K	1498	2053
	CRI>90	I02.LL.19782 . (...) . (...) . (...) . (...)	2700K	1157	1585
			3000K	1162	1592
			3500K	1187	1626
			4000K	1212	1660

Lenght / Uzunluk (A)	2 Watt - Driving Current / Watt - Sürüş Akımı		3 CRI / Kelvin		4 Product Color / Ürün Renk	
	27.5W 32W	27.5W (Direct) - 900mA 32W (Direct) - 1050mA	827 CRI>80 - 2700K	927 CRI>90 - 2700K	01 white	
595x595mm	19W 25W	19W (Direct) - 600mA 25W (Direct) - 800mA	830 CRI>80 - 3000K	930 CRI>90 - 3000K	02 ral 9010	
	12W 17W	12W (Direct) - 350mA 17W (Direct) - 500mA	835 CRI>80 - 3500K	935 CRI>90 - 3500K	03 black	
			840 CRI>80 - 4000K	940 CRI>90 - 4000K	04 gray	
			850 CRI>80 - 5000K		05 dark gray	
					06 special color	

6- Modular Ceiling / Taşyünü Asma Tavan




Ordering Code : I02.LL.19784.V1




Ordering Code : I02.LL.19783.V1




Ordering Code : I02.LL.19782.V1




Product Technical Drawing / Ürün Teknik Çizimi



6- Gypsum Ceiling / Alçı Tavan

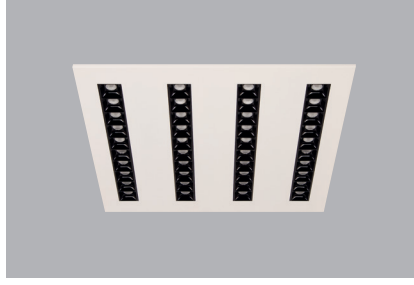


Ordering Code : I02.LL.19784.V2

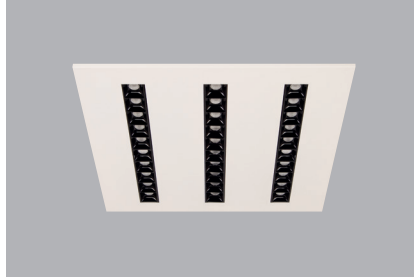


Ordering Code : I02.LL.19783.V2



Ordering Code : I02.LL.19782.V2



Product Technical Drawing / Ürün Teknik Çizimi

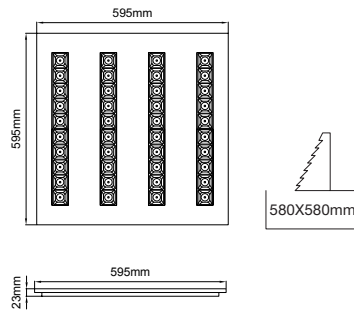

Super slim design with only 23mm depth.
Sadece 23mm derinliğe sahip süper ince gövde yapısı.