
PANEL Linea Led





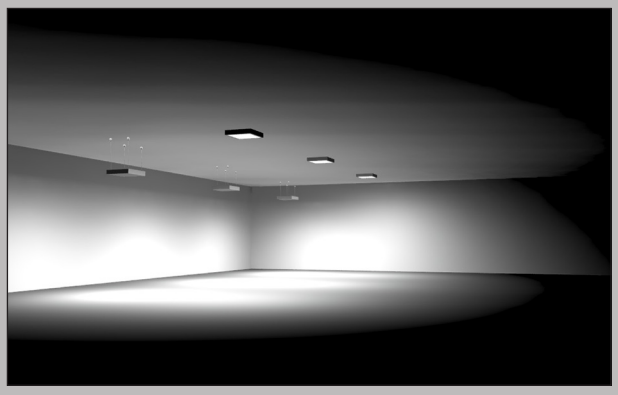

*Unique design of recess panel with same slim structure.

*Standard panel armatürler aynı inceliğe sahip ankastre versiyonu mevcuttur.



PANEL creates effect of light window for ceiling and wall installation. Particularly suitable for ambient illumination. Aluminium profile side corners.

Both T-Profile ceiling and recessed applicable versions available. Recess option with same slim structure option provides unique flexibility for false ceiling applications in which ceiling depth is low.


High efficient LGP panel diffuser provides minimum light loss.


PANEL duvar ve tavanda ışık penceresi görünümü yaratır. Genel aydınlatma için uygundur. Aluminyum profil yapıya sahiptir. Taşyünü tavan ve ankastre seçenekleri mevcuttur.


Aynı inceliğe sahip olacak şekilde ankastre versiyonu ile alçıpan derinliği düşük alanlarda uygulama kolaylığı sağlar.

Yüksek verimli LGP diffüzörü ile maksimum verimlilik sağlanır.

Panel T-Bar Ceiling

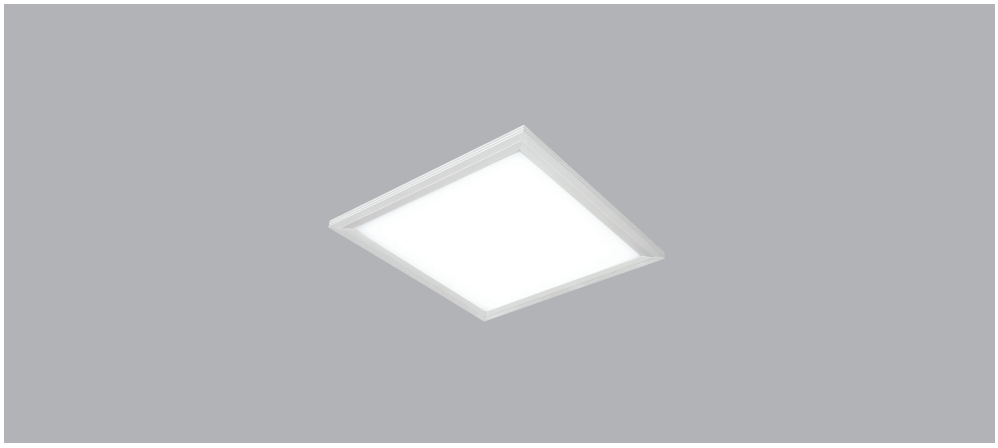

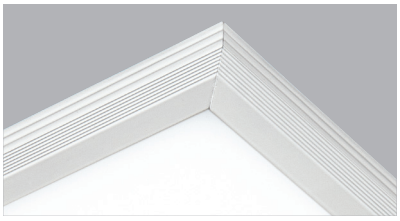

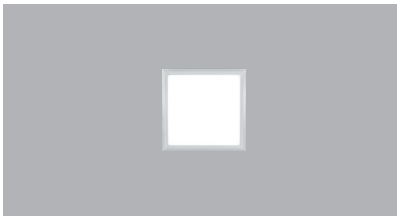


LED A A+ A++ | SASO | CB | LVD | CE | EAC | F | IP 40 | kg 1.2 | CRI 80 | CRI 90

4 / Product Color / Ürün Renk



WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06


Technical Drawing / Teknik Çizim

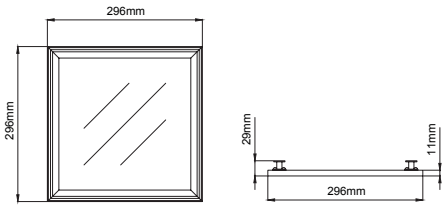

Beam Angle / Işık Açısı



Panel T-Bar Ceiling / I02.LL.19620



* Code example / Kod örneği:

I02.LL.19620 . 020 . 830 . 01
1 2 3 4

Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	20W 500mA lm
296x296mm	CRI>80	I02.LL.19620 . (...) . (...) . (...) . (...)	2700K	1107
			3000K	1143
			3500K	1160
			4000K	1205
			5000K	1222
	CRI>90	I02.LL.19620 . (...) . (...) . (...) . (...)	2700K	930
			3000K	957
			3500K	974
			4000K	1010


(...) / Complete Code / Komple Kod

Lenght / Uzunluk (A)	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin				4 Product Color / Ürün Renk		
296x296mm	20W	20W (Direct) - 500mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01	white
			830	CRI>80 - 3000K	930	CRI>90 - 3000K	02	ral 9010
			835	CRI>80 - 3500K	935	CRI>90 - 3500K	03	black
			840	CRI>80 - 4000K	940	CRI>90 - 4000K	04	gray
			850	CRI>80 - 5000K			05	dark gray
							06	special color

Panel Recessed





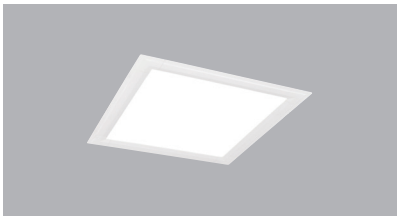

LED A A+ A++ SASO CB LVD CE EAC F IP40

kg 1.2 CRI 80 CRI 90


4 / Product Color / Ürün Renk

WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06

Beam Angle / Işık Açısı



Technical Drawing / Teknik Çizim

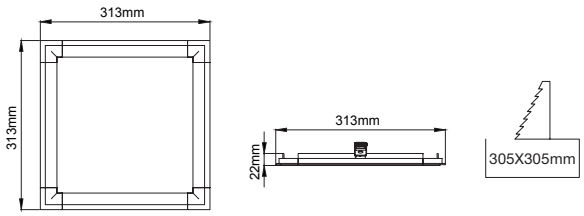

Panel Recessed / I02.LL.18620



* Code example / Kod örneği:

I02.LL.18620 . 020 . 830 . 01
1 2 3 4


Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	20W 500mA lm
313x313mm	CRI>80	I02.LL.19820 . (...) . (...) . (...) . (...)	2700K	1107
			3000K	1143
			3500K	1160
			4000K	1205
			5000K	1222
	CRI>90	I02.LL.19820 . (...) . (...) . (...) . (...)	2700K	930
			3000K	957
			3500K	974
			4000K	1010


(...) / Complete Code / Komple Kod

Lenght / Uzunluk (AxB)	Cutout Dimension / Kesim Ölçüsü	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin				4 Product Color / Ürün Renk	
313x313mm	305x305mm	20 20W - 500mA	827 CRI>80 - 2700K	927 CRI>90 - 2700K			01	white
			830 CRI>80 - 3000K	930 CRI>90 - 3000K			02	ral 9010
			835 CRI>80 - 3500K	935 CRI>90 - 3500K			03	black
			840 CRI>80 - 4000K	940 CRI>90 - 4000K			04	gray
			850 CRI>80 - 5000K				05	dark gray
							06	special color

Panel T-Bar Ceiling



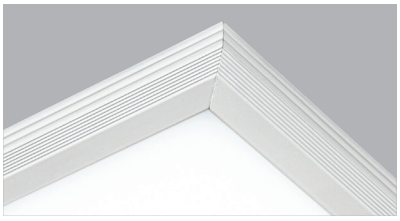

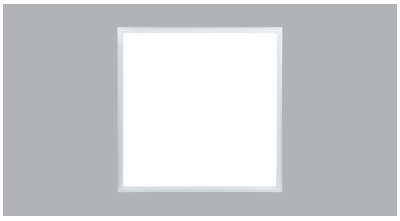


LED A A+ A++ | SASO | CB | LVD | CE | EAC | F | IP 40 | kg 3.8 | CRI 80 | CRI 90

4 / Product Color / Ürün Renk

WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06


Technical Drawing / Teknik Çizim

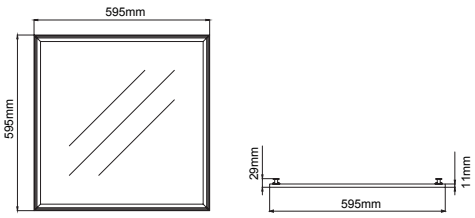

Beam Angle / Işık Açısı



Panel T-Bar Ceiling / I02.LL.19621



* Code example / Kod örneği:

I02.LL.19621 . 042 . 830 . 01
1 2 3 4

Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	42W 1050mA lm
595x595mm	CRI>80	I02.LL.19621 . (...) . (...) . (...) . (...)	2700K	3752
			3000K	3844
			3500K	3904
			4000K	4053
			5000K	4112
	CRI>90	I02.LL.19621 . (...) . (...) . (...) . (...)	2700K	3129
			3000K	3218
			3500K	3278
			4000K	3397


(...) / Complete Code / Komple Kod

Lenght / Uzunluk (A)	2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin			4	Product Color / Ürün Renk
595x595mm	42W	42W (Direct) - 1050mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01	white
			830	CRI>80 - 3000K	930	CRI>90 - 3000K	02	ral 9010
			835	CRI>80 - 3500K	935	CRI>90 - 3500K	03	black
			840	CRI>80 - 4000K	940	CRI>90 - 4000K	04	gray
			850	CRI>80 - 5000K			05	dark gray
							06	special color

Panel Recessed





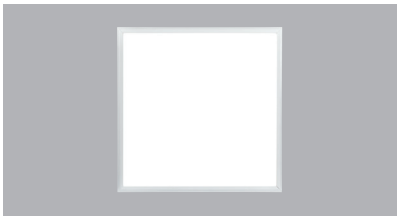

LED A A+ A++ | SASO | CB | LVD | CE | EAC | F | IP40 | kg 3.8 | CRI 80 | CRI 90


4 / Product Color / Ürün Renk

WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06

Beam Angle / Işık Açısı



Technical Drawing / Teknik Çizim

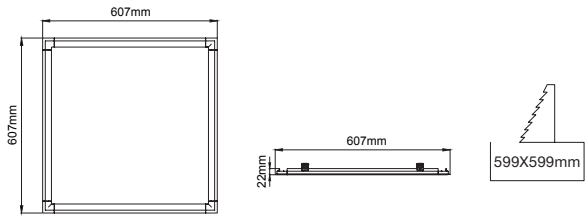

Panel Recessed / I02.LL.18621



* Code example / Kod örneği:


I02.LL.18621 . 042 . 830 . 01
1 2 3 4


Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	42W 1050mA lm
607x607mm	CRI>80	I02.LL.18621 . (...) . (...) . (...) . (...)	2700K	3752
			3000K	3844
			3500K	3904
			4000K	4053
			5000K	4112
	CRI>90	I02.LL.18621 . (...) . (...) . (...) . (...)	2700K	3129
			3000K	3218
			3500K	3278
			4000K	3397


(...) / Complete Code / Komple Kod

Lenght / Uzunluk (AxB)	Cutout Dimension / Kesim Ölçüsü	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin		4 Product Color / Ürün Renk
607x607mm	599x599mm	42 42W - 1050mA	827 CRI>80 - 2700K	927 CRI>90 - 2700K	01 white
			830 CRI>80 - 3000K	930 CRI>90 - 3000K	02 ral 9010
			835 CRI>80 - 3500K	935 CRI>90 - 3500K	03 black
			840 CRI>80 - 4000K	940 CRI>90 - 4000K	04 gray
			850 CRI>80 - 5000K		05 dark gray
					06 special color

Panel T-Bar Ceiling

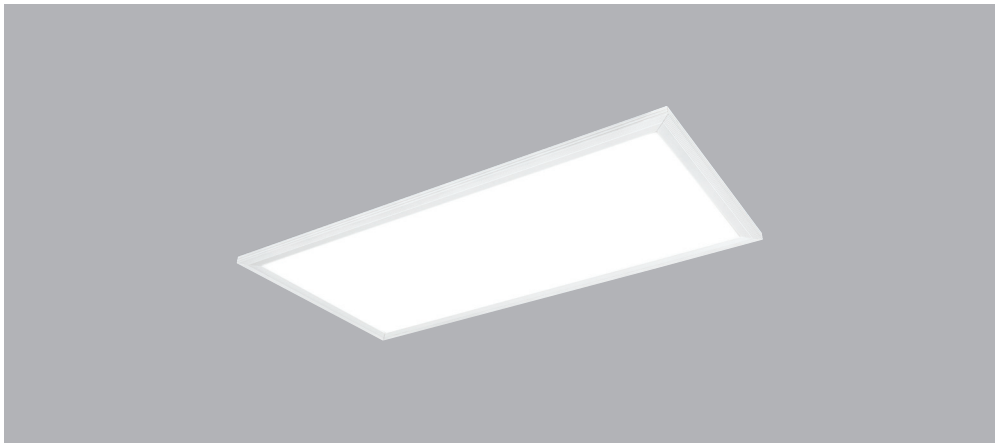

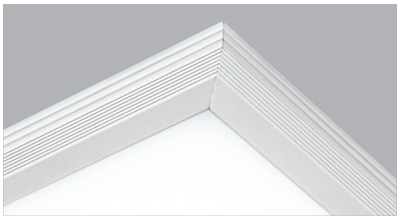

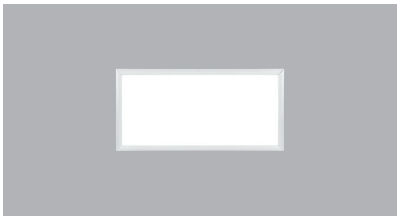


LED A A+ A++ | SASO CB LVD CE EAC F IP40 | kg 2 | CRI 80 CRI 90

4 / Product Color / Ürün Renk



WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06

Technical Drawing / Teknik Çizim

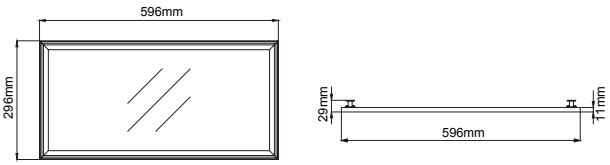

Beam Angle / Işık Açısı



Panel T-Bar Ceiling / I02.LL.19622



* Code example / Kod örneği:


I02.LL.19622 . 042 . 830 . 01
1 2 3 4

Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	42W 1050mA lm
296x596mm	CRI>80	I02.LL.19622 . (...) . (...) . (...) . (...)	2700K	3591
			3000K	3706
			3500K	3763
			4000K	3907
			5000K	3964
	CRI>90	I02.LL.19622 . (...) . (...) . (...) . (...)	2700K	3016
			3000K	3102
			3500K	3160
			4000K	3275


(...) / Complete Code / Komple Kod

Lenght / Uzunluk (A)	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin				4 Product Color / Ürün Renk		
296x596mm	42W	42W (Direct) - 1050mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01	white
			830	CRI>80 - 3000K	930	CRI>90 - 3000K	02	ral 9010
			835	CRI>80 - 3500K	935	CRI>90 - 3500K	03	black
			840	CRI>80 - 4000K	940	CRI>90 - 4000K	04	gray
			850	CRI>80 - 5000K			05	dark gray
							06	special color

Panel Recessed

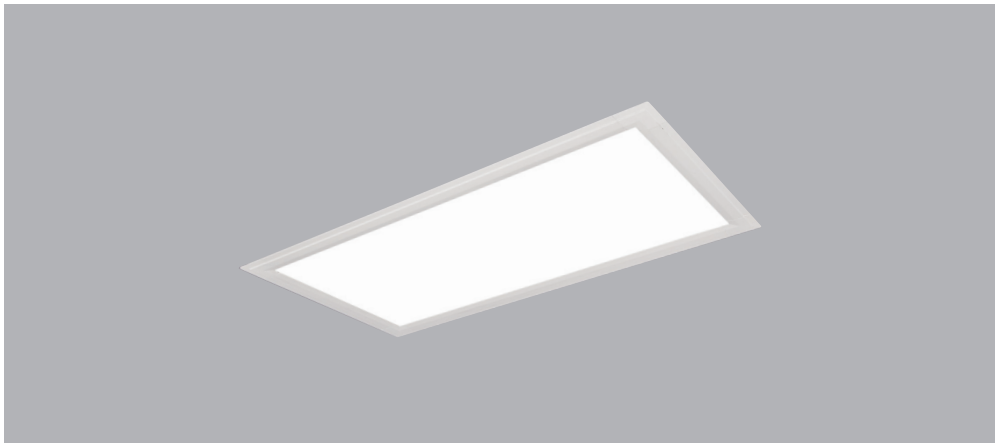



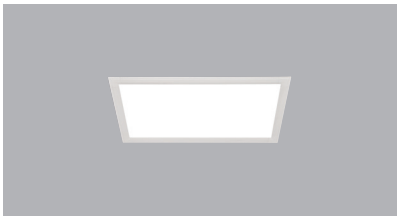


LED A A+ A++ | 0° 0° | SASO CB LVD CE EAC F IP40 | kg 2 | CRI 80 CRI 90

4 / Product Color / Ürün Renk



WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06

Technical Drawing / Teknik Çizim

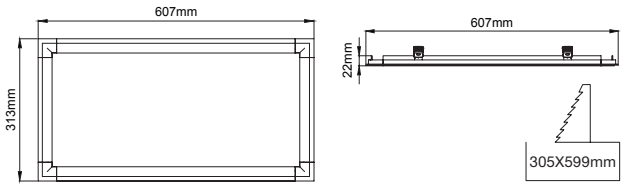

Beam Angle / Işık Açısı



Panel Recessed / I02.LL.18622



* Code example / Kod örneği:


I02.LL.18622 . 042 . 830 . 01
1 2 3 4


Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	42W 1050mA lm
313x607mm	CRI>80	I02.LL.18622 . (...) . (...) . (...) . (...)	2700K	3591
			3000K	3706
			3500K	3763
			4000K	3907
			5000K	3964
	CRI>90	I02.LL.18622 . (...) . (...) . (...) . (...)	2700K	3016
			3000K	3102
			3500K	3160
			4000K	3275

(...) / Complete Code / Komple Kod

Lenght / Uzunluk (AxB)	Cutout Dimension / Kesim Ölçüsü	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin				4 Product Color / Ürün Renk	
313x607mm	305x599mm	42	42W - 1050mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01	white
				830	CRI>80 - 3000K	930	CRI>90 - 3000K	02	ral 9010
				835	CRI>80 - 3500K	935	CRI>90 - 3500K	03	black
				840	CRI>80 - 4000K	940	CRI>90 - 4000K	04	gray
				850	CRI>80 - 5000K			05	dark gray
								06	special color

Panel T-Bar Ceiling

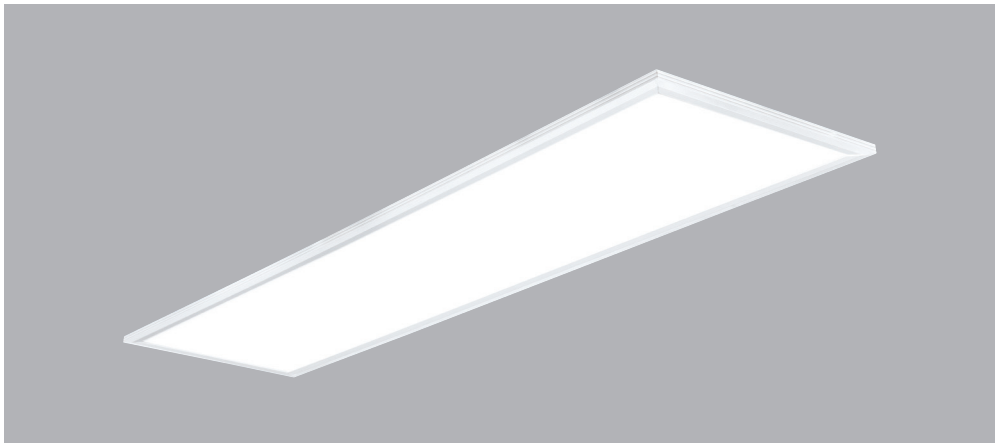

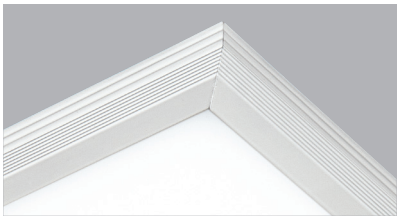



kg 3.6

4 / Product Color / Ürün Renk




WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06


Beam Angle / Işık Açısı



Technical Drawing / Teknik Çizim

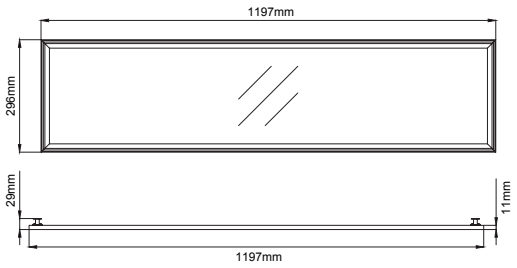

Panel T-Bar Ceiling / I02.LL.19623



* Code example / Kod örneği:

I02.LL.19623 . 059 . 830 . 01
1 2 3 4

Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	59W 2100mA lm
296x1197mm	CRI>80	I02.LL.19623 . (...) . (...) . (...) . (...)	2700K	4984
			3000K	5144
			3500K	5223
			4000K	5423
			5000K	5503
	CRI>90	I02.LL.19623 . (...) . (...) . (...) . (...)	2700K	4187
			3000K	4306
			3500K	4386
			4000K	4546

(...) / Complete Code / Komple Kod

Lenght / Uzunluk (A)	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin				4 Product Color / Ürün Renk		
296x1197mm	59W	59W (Direct) - 2100mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01	white
			830	CRI>80 - 3000K	930	CRI>90 - 3000K	02	ral 9010
			835	CRI>80 - 3500K	935	CRI>90 - 3500K	03	black
			840	CRI>80 - 4000K	940	CRI>90 - 4000K	04	gray
			850	CRI>80 - 5000K			05	dark gray
							06	special color

Panel Recessed







LED A A+ A++ | 0° 0° | SASO CB LVD CE EAC F IP40 | kg 3.6 | CRI 80 CRI 90


4 / Product Color / Ürün Renk

WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06


Beam Angle / Işık Açısı



Technical Drawing / Teknik Çizim

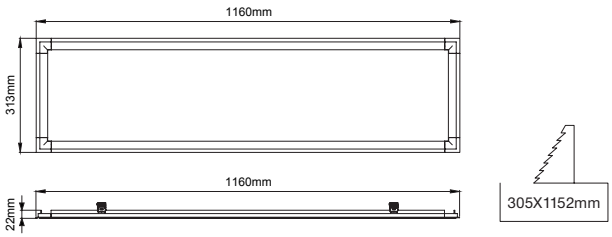

Panel Recessed / I02.LL.18623



* Code example / Kod örneği:

I02.LL.18623 . 059 . 830 . 01
1 2 3 4


Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	59W 2100mA lm
313x607mm	CRI>80	I02.LL.18623 . (...) . (...) . (...) . (...)	2700K	4984
			3000K	5144
			3500K	5223
			4000K	5423
			5000K	5503
	CRI>90	I02.LL.18623 . (...) . (...) . (...) . (...)	2700K	4187
			3000K	4306
			3500K	4386
			4000K	4546

(...) / Complete Code / Komple Kod


Lenght / Uzunluk (AxB)	Cutout Dimension / Kesim Ölçüsü	2 Watt - Driving Current / Watt - Sürüş Akımı	3 CRI / Kelvin				4 Product Color / Ürün Renk	
313x1160mm	305x1152mm	59 59W - 2100mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01	white
			830	CRI>80 - 3000K	930	CRI>90 - 3000K	02	ral 9010
			835	CRI>80 - 3500K	935	CRI>90 - 3500K	03	black
			840	CRI>80 - 4000K	940	CRI>90 - 4000K	04	gray
			850	CRI>80 - 5000K			05	dark gray
							06	special color



LDT Files / LDT Dataları



I02.LL.19620


I02.LL.18620



I02.LL.19621



I02.LL.18621

Beam Angle: 116° 20W / 0mA / SMD LED

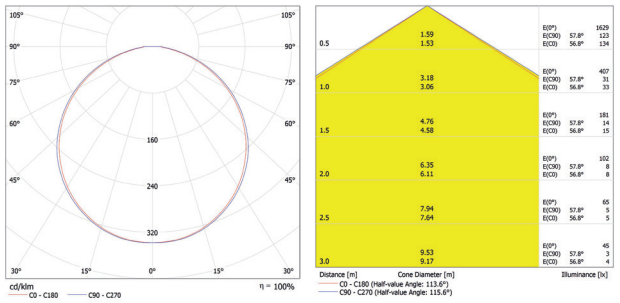


Beam Angle: 116° 42W / 0mA / SMD LED

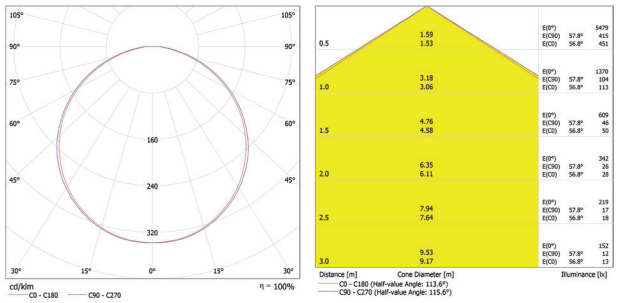



I02.LL.19622


I02.LL.18622


I02.LL.19623


I02.LL.18623

Beam Angle: 116° 42W / 0mA / SMD LED

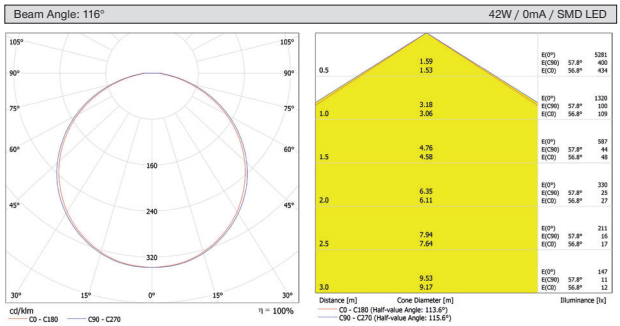

Beam Angle: 116° 59W / 0mA / SMD LED

