

Saturn Maxi




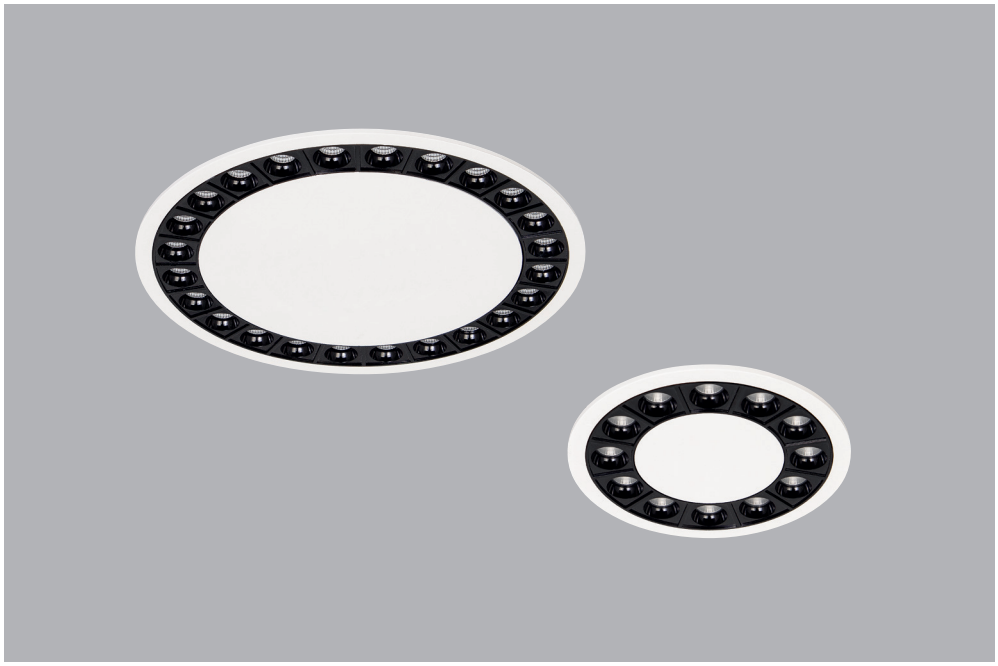

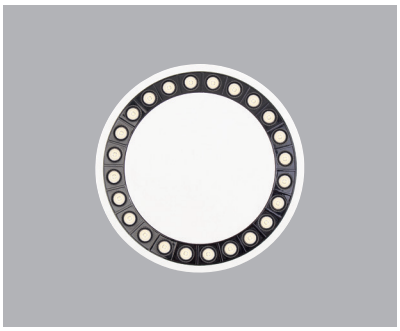

LED A A+ A++ 0° 0° SASO CB LVD CE EAC F IP40 CRI 80 CRI 90

4 / Reflector Angle / Reflektör Açısı



* See page 759 for Idt files. / Işık eğrileri için sayfa 759 bakınız.

5 / Product Color / Ürün Renk



WHITE = 01 | Ral 9010 = 02 | BLACK = 03 | GRAY = 04 | DARK GRAY = 05 | SPECIAL COLOR = 06

EN


- Die-cast aluminium body.
- Mains voltege: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim, Wireless Dim and RGBW options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Spot, Medium and Flood beam angle option available with rotationally symmetric light distribution.
- Standart CRI>80 and high CRI>90 LED options available.
- Up to 124lm/W efficiency.
- Special antiglare PMMA black coated optic with UGR<19 function.
- High colour consistency: <3 SDCM
- IP44 Protection rating.

TR


- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM, Dinamik Beyaz ve RGBW uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağlı özel renk seçenekleri uygulanabilir.
- Dar, Orta ve Geniş reflektör açı seçeneği mevcuttur.
- Standart CRI>80 ve yüksek CRI>90 LED seçenekleri mevcuttur.
- 124lm/W'a varan verim.
- Özel metalize siyah kaplamalı PMMA maske UGR<19 özelliği sağlamaktadır.
- Yüksek renk uyumu: <3 SDCM.
- IP44 koruma sınıfı.

Saturn Maxi

Saturn Maxi / I02.PLR.99924



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T_C=50° Lümen
35W	CRI>80	I02.PLR.99924 . (..) . (...) . (..) . (..)	2700K	2667
			3000K	2750
			3500K	2805
			4000K	2862
			5000K	2947
	CRI>90	I02.PLR.99924 . (..) . (...) . (..) . (..)	2700K	2482
			3000K	2559
			3500K	2607
			4000K	2660
			5000K	X
	CRI>98	I02.PLR.99924 . (..) . (...) . (..) . (..)	2700K	X
			3000K	X
			4000K	X




* Code example / Kod örneği:


I02.PLR.99924 . 35 . 827 . SP . 01
1 2 3 4 5

1- Product code / Armatür kodu
2- Power / Güç
3- CRI / Kelvin
4- Reflector angle / Reflektör açısı
5- Colour / Ürün renk

Saturn Mini / I02.PLR.99912



Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T_C=50° Lümen
20W	CRI>80	I02.PLR.99912 . (..) . (...) . (..) . (..)	2700K	1483
			3000K	1531
			3500K	1561
			4000K	1593
			5000K	1639
	CRI>90	I02.PLR.99912 . (..) . (...) . (..) . (..)	2700K	1381
			3000K	1423
			3500K	1450
			4000K	1480
			5000K	X
	CRI>98	I02.PLR.99912 . (..) . (...) . (..) . (..)	2700K	X
			3000K	X
			4000K	X



* Code example / Kod örneği:

I02.PLR.99912 . 20 . 827 . SP . 01
1 2 3 4 5

1- Product code / Armatür kodu
2- Power / Güç
3- CRI / Kelvin
4- Reflector angle / Reflektör açısı
5- Colour / Ürün renk

(..) / Complete Code / Komple Kod

2	Watt - Driving Current / Watt - Sürüş Akımı
35	35W - 900mA
20	20W - 500mA

3	CRI / Kelvin		
827	CRI>80 - 2700K	9827	CRI>98 - 2700K
830	CRI>80 - 3000K	9830	CRI>98 - 3000K
835	CRI>80 - 3500K	9840	CRI>98 -4000K
840	CRI>80 - 4000K		
850	CRI>80 - 5000K		
927	CRI>90 - 2700K		
930	CRI>90 - 3000K		
935	CRI>90 - 3500K		
940	CRI>90 - 4000K		

4	Reflector Angle / Reflektör Açısı
SP	18° - Spot
ME	30° - Medium
FL	48° - Flood

5	Product Color / Ürün Renk
01	white
02	ral 9010
03	black
04	gray
05	dark gray
06	special color