Rainbow







LED A A+ A++ 180° 0° PBS SASO CB LVD EAC CE IP66 IK08 CRI 80


5 / Product Color / Ürün Renk


White = 01 | Light Gray = 04 | Textured Metalic Dark Gray = 05 | Black = 03

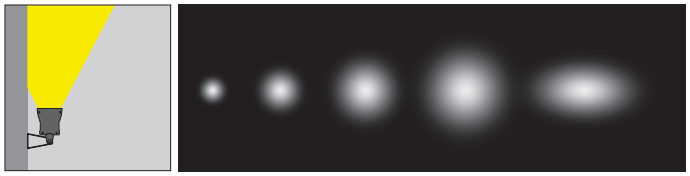


* See page 462 for Idt files. / Işık eğrileri için sayfa 462 bakınız.









EN

- Direct lighting luminaire for use with LEDs.
- Corrosion resistant aluminium profile body and die-cast aluminium end caps.
- Installation with bracket on floor, walls and ceiling surfaces.
- Mains voltage: 220-240V / 50-60Hz.
- Super Spot, spot, medium, flood and oval beam angles available.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K, 5000K and 6500K.
- Coloured Led options green, red, blue and amber available.
- Optionally 2 cable entries for through-wiring of mains supply cable.
- Internal silicon gaskets ensure IP protection.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Up to 110lm/W efficiency.
- High colour consistency: <3 SDCM
- RGB and RGBW options available.
- Stainless steel cable gland and mains cable provided with IP68 socket.
- Mechanical aiming lock.
- Flexible adjusting mechanism enables fitting move 180° in one axis.
- Reliable system with L80 B10 50000 hours lifetime parameters.
- Five years warranty.

TR

- Led'li simetrik ışık çıkışlı cephe aydınlatma armatürü.
- Korozyona dayanıklı aluminyum profil gövde ve aluminyum enjeksyon sonlama kapak.
- Braketli montaj sistemi sayesinde zemin, duvar ve tavan yüzeylerine kolayca montaj edilebilir.
- 220-240V / 50-60Hz enerji girişli.
- Çok dar, dar, orta, geniş ve oval açı seçenekleri mevcuttur.
- 2700K, 3000K, 3500K, 4000K, 5000K ve 6500K renk sıcaklığı seçenekleri mevcuttur.
- Yeşil, kırmızı, mavi ve amber renk seçenekleri mevcuttur.
- Opsiyonel olarak 2 kablo giriş terminali ile armatürler arası atlama yapılabilir.
- Silikon contalar ile IP koruması sorunsuz sağlanır.
- Tüm dış vidalar paslanmazdır.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı.
- 110lm/W'a kadar ulaşan verim.
- Yüksek renk uyumu: <3 SDCM
- RGB ve RGBW seçenekleri mevcuttur.
- Armatürde paslanmaz kablo rekoru kullanılmaktadır ve 220V ana şebeke kablosunda IP68 korumalı konnektör bulunmaktadır.
- Mekanik kilitleme sistemi.
- Esnek montaj ayakları sayesinde tek düzlemde 180° hareket sağlanır.
- L80 B10 50000 saat ömür parametrelerine sahip güvenli sistem.
- Beş yıl garanti.

Rainbow

Rainbow / O07.WL.16020





* Code example / Kod örneği:


O07.WL.16020 . 330 . 11 . 830 . 25 . 01


1 2 3 4 5 6


1- Product code / Armatür kodu
2- Lenght / Uzunluk
3- Power / Güç
4- CRI / Kelvin
5- Beam Angle / Işık Açısı
6- Colour / Ürün renk
7- Control type / Kontrol tipi











Lenght / Uzunluk (A)	Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T_C=50° Lümen
330mm	11W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K	1115
				3000K	1128
				3500K	1179
				4000K	1205
				5000K	1218
				6500K	1231
	7.3W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Red / Kırmızı	544
	10W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Green / Yeşil	924
	10W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Blue / Mavi	460
	10W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Amber	1002
	11W	Tunable White / Dinamik Beyaz	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K - 6000K	716 - 926
	10W	RGBW	O07.WL.16020 . (..) . (...) . (..) . (..)	RGBW	572
604mm	22W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K	2230
				3000K	2256
				3500K	2359
				4000K	2411
				5000K	2437
				6500K	2463
	14.5W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Red / Kırmızı	1089
	19.8W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Green / Yeşil	1848
	20W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Blue / Mavi	920
	20W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Amber	2004
	22W	Tunable White / Dinamik Beyaz	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K - 6000K	1432 - 1852
	20W	RGBW	O07.WL.16020 . (..) . (...) . (..) . (..)	RGBW	1144
930mm	33W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K	3345
				3000K	3384
				3500K	3539
				4000K	3617
				5000K	3656
				6500K	3695
	22W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Red / Kırmızı	1632
	29.7W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Green / Yeşil	2772
	30W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Blue / Mavi	1380
	30W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Amber	3006
	33W	Tunable White / Dinamik Beyaz	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K - 6000K	2148 - 2778
	30W	RGBW	O07.WL.16020 . (..) . (...) . (..) . (..)	RGBW	1716
1150mm	44W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K	4460
				3000K	4512
				3500K	4719
				4000K	4823
				5000K	4875
				6500K	4927
	29W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Red / Kırmızı	2176
	39.5W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Green / Yeşil	3696
	40W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Blue / Mavi	1840
	40W	CRI>80	O07.WL.16020 . (..) . (...) . (..) . (..)	Amber	4008
	44W	Tunable White / Dinamik Beyaz	O07.WL.16020 . (..) . (...) . (..) . (..)	2700K - 6000K	2864 - 3702
	40W	RGBW	O07.WL.16020 . (..) . (...) . (..) . (..)	RGBW	2288

(...) / Complete Code / Komple Kod

2 Lenght / Uzunluk (A)	3 Watt - Driving Current / Watt - Sürüş Akımı	5 CRI / Kelvin				4 Beam Angle / Işık Açısı		6 Product Color / Ürün Renk	
1150mm	44W	44W - 1400mA	827	CRI>80 - 2700K	625	Red / Kırmızı	SS	14° - Super Spot	01 white
930mm	33W	33W - 1050mA	830	CRI>80 - 3000K	525	Green / Yeşil	SP	25° - Spot	02 ral 9010
604mm	22W	22W - 700mA	835	CRI>80 - 3500K	470	Blue / Mavi	ME	30° - Medium	03 black
330mm	11W	10W - 350mA	840	CRI>80 - 4000K	590	Amber	FL	45° - Flood	04 gray
			850	CRI>80 - 5000K	TW	2700K - 6000K	OV	40° x 18° - Oval	05 dark gray
			865	CRI>80 - 6500K	RGBW	RGBW			06 special color