


Industrial / I02.LL.19201

Lenght / Uzunluk (A)	CRI	Order Code / Sipariş Kodu	Kelvin	50W 250mA lm	60W 300mA lm	70W 350mA lm
1457mm	CRI>80	I02.LL.19201 . (...) . (...) . (...) . (...)	2700K	6091	8168	8384
			3000K	6286	8430	8653
			3500K	6383	8560	8787
			4000K	6627	8887	9122
			5000K	6725	9018	9257
CRI>90	I02.LL.19201 . (...) . (...) . (...) . (...)	2700K	5116	6861	7043	
		3000K	5263	7058	7244	
		3500K	5360	7188	7378	
		4000K	5555	7449	7646	

Complete Code / Komple Kod	2	3	4		5	
	Lenght / Uzunluk (A)	Watt - Driving Current / Watt - Sürüş Akımı	CRI / Kelvin		Product Color / Ürün Renk	
1457mm	50W 60W 70W	50W (Direct) - 250mA 60W (Direct) - 300mA 70W (Direct) - 350mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K
			830	CRI>80 - 3000K	930	CRI>90 - 3000K
			835	CRI>80 - 3500K	935	CRI>90 - 3500K
			840	CRI>80 - 4000K	940	CRI>90 - 4000K
			850	CRI>80 - 5000K		
				01	white	
				02	ral 9010	
				03	black	
				04	gray	
				05	dark gray	
				06	special color	

Continious Mounting / Kesintisiz Montaj

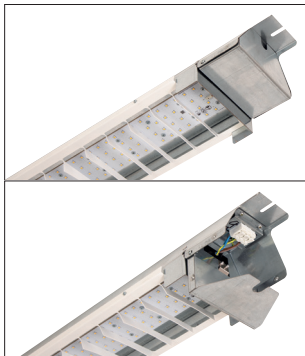

System of the INDUSTRIAL is very easy for installation at site. By opening the end cap without requirement of any tool, luminaire can be opened easily for mains connection. Availability of 5-pole plug and 2.5mm cables provides thru wiring. Mounting holes on both sides ease the surface mounting. Alternatively luminaire can be delivered on track mounting version.

INDUSTRIAL armatürünün saha montajı basittir. Armatürün iki kenarında bulunan ve herhangi bir el aleti gerektirmeden açılan kapaklar sayesinde 220V bağlantısının yapılacağı klemens girişlerine kolayca ulaşılabilir. Armatürün iç mekanizmasında bulunan 5'li basmalı klemens ve 2.5mm atlama kabloları sayesinde kesintisiz aydınlatma hattı oluşturulabilir.

