

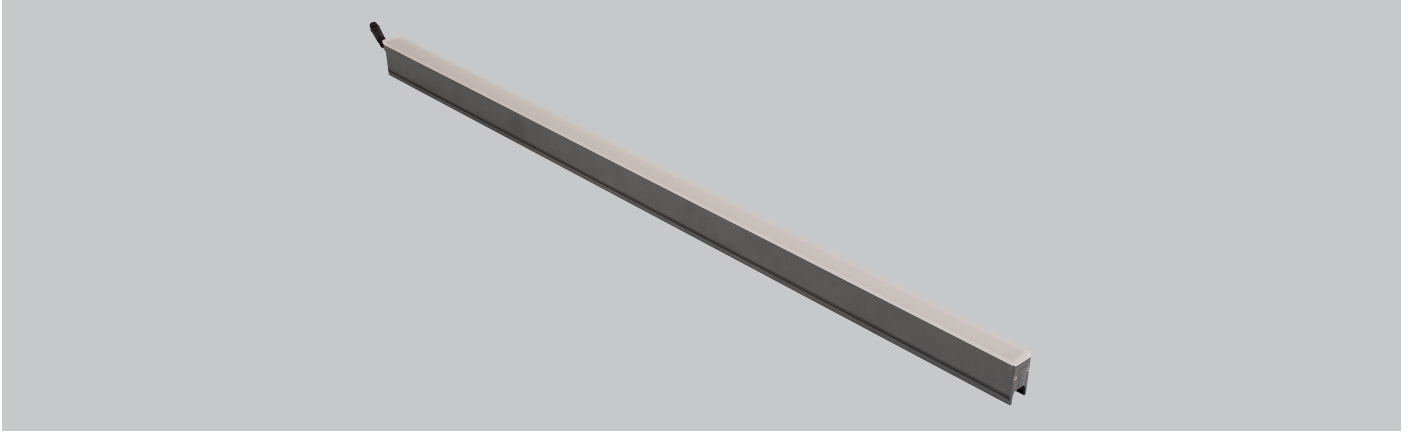



Nero



5 / Product Color / Ürün Renk



* See page 481 for ldt files. / Işık eğrileri için sayfa 481 bakınız.

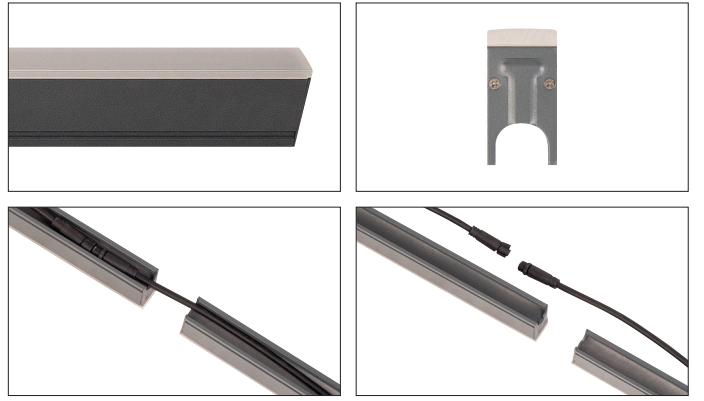


EN

- Direct lighting luminaire for use with LEDs.
- Corrosion resistant aluminium profile body.
- Installation with bracket on walls and ceiling surfaces.
- 24V DC Input system to be supplied by an external driver.
- Fully homogenous light output with no visible dots.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K, 5000K and 6500K.
- Colour Led options green, red, blue and amber available.
- IP in/out cables available on the back of the luminaire for continuous installation.
- Internal silicon gaskets ensure IP protection.
- All external screws are stainless steel.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- High colour consistency: <3 SDCM
- Reliable system with L80 B10 50000 hours lifetime parameters.
- Five years warranty.

TR

- Led'li simetrik ışık çıkışlı cephe aydınlatma armatürü.
- Korozyona dayanıklı alüminyum profil gövde.
- Braketli montaj sistemi sayesinde duvar ve tavan yüzeylerine kolayca montaj edilebilir.
- 24V DC girişli sistem. Armatür harici trafo ile beslenmektedir.
- Led'lerin tek tek gözükmediği tamamen homojen ışık çıkışı.
- 2700K, 3000K, 3500K, 4000K, 5000K ve 6500K renk sıcaklığı seçenekleri mevcuttur.
- Yeşil, kırmızı, mavi ve amber renk seçenekleri mevcuttur.
- Armatür arka bölümünde bulunan giriş/çıkış IP konnektörler sayesinde birbirine kesintisiz olarak bağlanabilir.
- Silikon contalar ile IP koruması sorunsuz sağlanır.
- Tüm dış vidalar paslanmazdır.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı.
- Yüksek renk uyumu: <3 SDCM
- L80 B10 50000 saat ömür parametrelerine sahip güvenli sistem.
- Beş yıl garanti.

Nero / O07.WL.16040


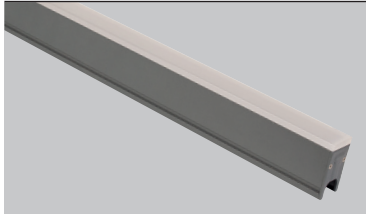


Lenght / Uzunluk (A)	Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
1000mm	20W	CRI>80	O07.WL.16040 . (..) . (...) . (..) . (..)	2700K	495
				3000K	550
				3500K	577
				4000K	600
				5000K	622
13W	18W	CRI>80	O07.WL.16040 . (..) . (...) . (..) . (..)	6500K	644
				Red / Kırmızı	360
				Green / Yeşil	660
				Blue / Mavi	347
				Amber	652
15W	RGBW	RGBW	O07.WL.16040 . (..) . (...) . (..) . (..)	RGBW	280

* Code example / Kod örneği:

O07.WL.16040 . 1000 . 20 . 830 . 137 . 01

- 1- Product code / Armatür kodu
- 2- Lenght / Uzunluk
- 3- Power / Güç
- 4- CRI / Kelvin
- 5- Beam Angle / Işık Açısı
- 6- Colour / Ürün renk
- 7- Control type / Kontrol tipi



2 Lenght / Uzunluk (A)	3 Watt - Driving Current / Watt - Sürüş Akımı	5 CRI / Kelvin		4 Beam Angle / Işık Açısı		6 Product Color / Ürün Renk	
		1000mm	20W 20W - 24V DC	827 CRI>80 - 2700K	625 Red / Kırmızı	WF 137° - Wide Flood	01 white
		830 CRI>80 - 3000K	525 Green / Yeşil		03 black	04 gray	
		835 CRI>80 - 3500K	470 Blue / Mavi		05 dark gray	06 special color	
		840 CRI>80 - 4000K	590 Amber				
		850 CRI>80 - 5000K	TW 2700K - 6000K				
		865 CRI>80 - 6500K	RGBW RGBW				

